

Bohrreibahlen

Foret alésoir

Punta alesatore

Drill reamer



SPHINX

Sphinx Werkzeuge AG • Industriestrasse 6 • CH-4562 Biberist / Switzerland
Phone +41 32 671 21 00 • Fax +41 32 671 21 11 • sphinx@sphinx-tools.ch • www.sphinx-tools.ch



Bohrreibahle ASYCUT aus Vollhartmetall


Foret alésoir ASYCUT en métal dur

Punta alesatore ASYCUT in metallo duro


Drill reamer ASYCUT in solid carbide

Art. 50 840

Submicron
K20/30




Z
2



DIN
6539

Typ
N



AL


ST
AC

INOX
STAINLESS

GG
GGG

H7-H9

HRC
<50

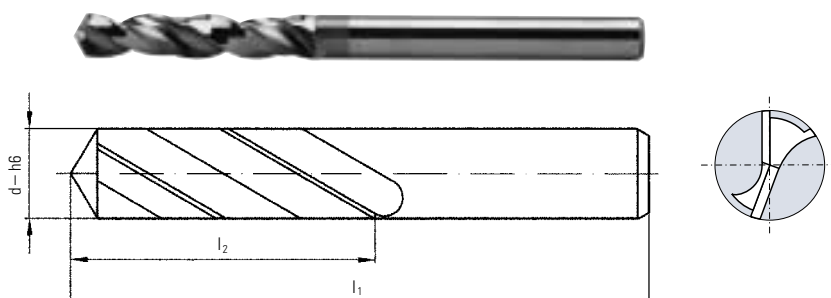

Abmessungen, Dimensions, Dimensioni, Dimensions

d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm
2.00	38	11.5	4.90	62	25.0	7.80	79	36.0	13.00	102	49.0
2.10	38	11.5	5.00	62	25.0	7.90	79	36.0	13.50	107	52.0
2.20	40	12.5	5.10	62	25.0	8.00	79	36.0	14.00	107	52.0
2.30	40	12.5	5.20	62	25.0	8.10	79	36.0			
2.40	43	13.5	5.30	62	25.0	8.20	79	36.0			
2.50	43	13.5	5.40	66	27.0	8.30	79	36.0			
2.60	43	13.5	5.50	66	27.0	8.40	79	36.0			
2.70	46	15.5	5.60	66	27.0	8.50	79	36.0			
2.80	46	15.5	5.70	66	27.0	8.60	84	39.0			
2.90	46	15.5	5.80	66	27.0	8.70	84	39.0			
3.00	46	15.5	5.90	66	27.0	8.80	84	39.0			
3.10	49	17.5	6.00	66	27.0	8.90	84	39.0			
3.20	49	17.5	6.10	70	30.0	9.00	84	39.0			
3.30	49	17.5	6.20	70	30.0	9.10	84	39.0			
3.40	52	19.5	6.30	70	30.0	9.20	84	39.0			
3.50	52	19.5	6.40	70	30.0	9.30	84	39.0			
3.60	52	19.5	6.50	70	30.0	9.40	84	39.0			
3.70	52	19.5	6.60	70	30.0	9.50	84	39.0			
3.80	55	21.5	6.70	70	30.0	9.60	89	41.0			
3.90	55	21.5	6.80	74	33.0	9.70	89	41.0			
4.00	55	21.5	6.90	74	33.0	9.80	89	41.0			
4.10	55	21.5	7.00	74	33.0	9.90	89	41.0			
4.20	55	21.5	7.10	74	33.0	10.00	89	41.0			
4.30	58	23.0	7.20	74	33.0	10.20	89	41.0			
4.40	58	23.0	7.30	74	33.0	10.50	89	41.0			
4.50	58	23.0	7.40	74	33.0	11.00	95	45.0			
4.60	58	23.0	7.50	74	33.0	11.50	95	45.0			
4.70	58	23.0	7.60	79	36.0	12.00	102	49.0			
4.80	62	25.0	7.70	79	36.0	12.50	102	49.0			




Bohrreibahle TRICUT aus Vollhartmetall

Foret alésoir TRICUT en métal dur

Punta alesatore TRICUT in metallo duro

Drill reamer TRICUT in solid carbide

Art. 55 654

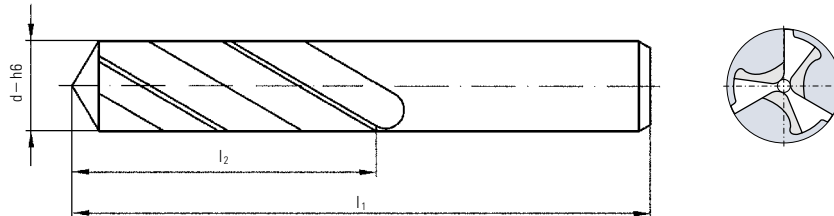

Abmessungen, Dimensions, Dimensi, Dimensi

d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	
1.00	26	6.0	3.80	55	21.0	6.350	1/4"	70	9.00	84	36.5	
1.10	28	6.5	3.90	55	21.0	6.40	70	28.5	9.10	84	36.5	
1.20	30	7.5	3.969	5/32"	55	6.50	70	28.5	9.20	84	36.5	
1.30	30	7.5	4.00	55	21.0	6.60	70	28.5	9.30	84	36.5	
1.40	32	8.5	4.10	55	21.0	6.70	70	28.5	9.40	84	36.5	
1.50	32	8.5	4.20	55	21.0	6.80	74	31.0	9.50	84	36.5	
1.60	34	9.5	4.30	58	22.5	6.90	74	31.0	9.525	3/8"	89	39.0
1.70	34	9.5	4.40	58	22.5	7.00	74	31.0	9.60	89	39.0	
1.80	36	10.5	4.50	58	22.5	7.10	74	31.0	9.70	89	39.0	
1.90	36	10.5	4.60	58	22.5	7.144	9/32"	74	9.80	89	39.0	
2.00	38	11.5	4.70	58	22.5	7.20	74	31.0	9.90	89	39.0	
2.10	38	11.5	4.763	3/16"	62	7.30	74	31.0	10.00	89	39.0	
2.20	40	12.5	4.80	62	24.5	7.40	74	31.0	10.20	89	39.0	
2.30	40	12.5	4.90	62	24.5	7.50	74	31.0	10.50	89	39.0	
2.40	43	13.5	5.00	62	24.5	7.60	79	34.0	11.00	95	43.0	
2.50	43	13.5	5.10	62	24.5	7.70	79	34.0	11.113	7/16"	95	43.0
2.60	43	13.5	5.20	62	24.5	7.80	79	34.0	11.50	95	43.0	
2.70	46	15.5	5.30	62	24.5	7.90	79	34.0	12.00	102	47.0	
2.80	46	15.5	5.40	66	26.0	7.938	5/16"	79	12.50	102	47.0	
2.90	46	15.5	5.50	66	26.0	8.00	79	34.0	12.700	1/2"	102	47.0
3.00	46	15.5	5.556	7/32"	66	8.10	79	34.0	13.00	102	47.0	
3.10	49	17.0	5.60	66	26.0	8.20	79	34.0	13.50	107	50.0	
3.175	1/8"	49	5.70	66	26.0	8.30	79	34.0	14.00	107	50.0	
3.20	49	17.0	5.80	66	26.0	8.40	79	34.0				
3.30	49	17.0	5.90	66	26.0	8.50	79	34.0				
3.40	52	19.0	6.00	66	26.0	8.60	84	36.5				
3.50	52	19.0	6.10	70	28.5	8.70	84	36.5				
3.60	52	19.0	6.20	70	28.5	8.80	84	36.5				
3.70	52	19.0	6.30	70	28.5	8.90	84	36.5				



Bohrreibahle TRICUT LONG aus Vollhartmetall

Foret alésoir TRICUT LONG en métal dur

Punta alesatore TRICUT LONG in metallo duro

Drill reamer TRICUT LONG in solid carbide

Art. 55 338

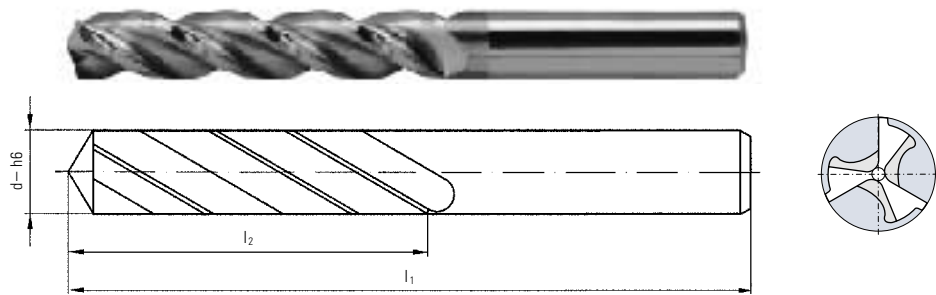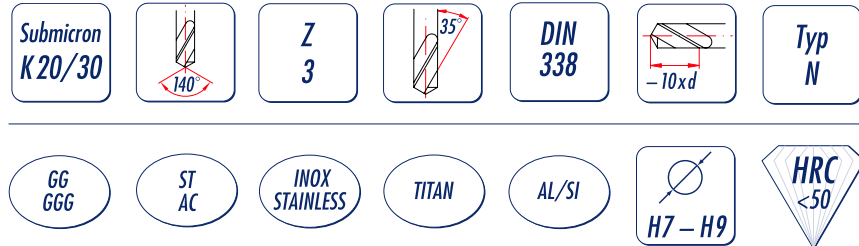

Abmessungen, Dimensions, Dimensioni, Dimensions

d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm	d-h6 mm	l ₁ mm	l ₂ mm
1.00	34	11.5	3.90	75	41.0	6.80	109	66.0	9.70	133	84.0
1.10	36	13.0	4.00	75	41.0	6.90	109	66.0	9.80	133	84.0
1.20	38	15.0	4.10	75	41.0	7.00	109	66.0	9.90	133	84.0
1.30	38	15.0	4.20	75	41.0	7.10	109	66.0	10.00	133	84.0
1.40	40	17.0	4.30	80	45.0	7.20	109	66.0	10.20	133	84.0
1.50	40	17.0	4.40	80	45.0	7.30	109	66.0	10.50	133	84.0
1.60	43	19.0	4.50	80	45.0	7.40	109	66.0	11.00	142	91.0
1.70	43	19.0	4.60	80	45.0	7.50	109	66.0	11.50	142	91.0
1.80	46	21.0	4.70	80	45.0	7.60	117	72.0	12.00	151	98.0
1.90	46	21.0	4.80	86	50.0	7.70	117	72.0	12.50	151	98.0
2.00	49	22.0	4.90	86	50.0	7.80	117	72.0	13.00	151	98.0
2.10	49	22.0	5.00	86	50.0	7.90	117	72.0	13.50	160	105.0
2.20	53	25.0	5.10	86	50.0	8.00	117	72.0	14.00	160	105.0
2.30	53	25.0	5.20	86	50.0	8.10	117	72.0			
2.40	57	28.0	5.30	86	50.0	8.20	117	72.0			
2.50	57	28.0	5.40	93	55.0	8.30	117	72.0			
2.60	57	28.0	5.50	93	55.0	8.40	117	72.0			
2.70	61	31.0	5.60	93	55.0	8.50	117	72.0			
2.80	61	31.0	5.70	93	55.0	8.60	125	78.0			
2.90	61	31.0	5.80	93	55.0	8.70	125	78.0			
3.00	61	31.0	5.90	93	55.0	8.80	125	78.0			
3.10	65	34.0	6.00	93	55.0	8.90	125	78.0			
3.20	65	34.0	6.10	101	60.0	9.00	125	78.0			
3.30	65	34.0	6.20	101	60.0	9.10	125	78.0			
3.40	70	37.0	6.30	101	60.0	9.20	125	78.0			
3.50	70	37.0	6.40	101	60.0	9.30	125	78.0			
3.60	70	37.0	6.50	101	60.0	9.40	125	78.0			
3.70	70	37.0	6.60	101	60.0	9.50	125	78.0			
3.80	75	41.0	6.70	101	60.0	9.60	133	84.0			